


How to edit recipe database from ftp


Users can copy HMI Recipe.db to PC using FTP, and then edit Recipe.db in C:\EBPro\DatabaseEditor. The edited Recipe.db can be downloaded to HMI using Utility Manager.

The following describes the steps:


1. Before login FTP Server, please check HMI IP address.

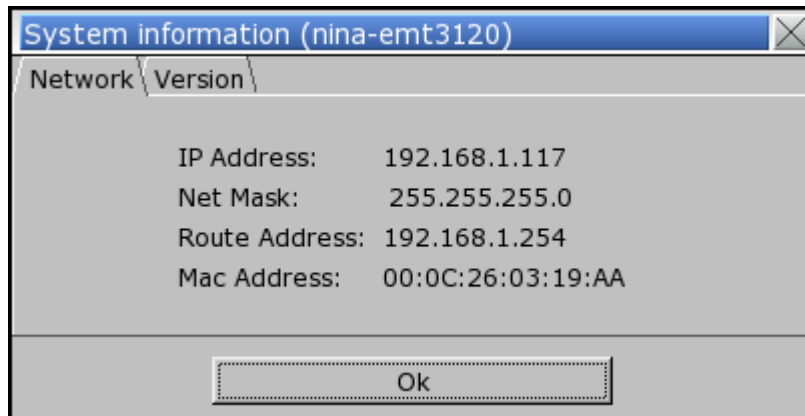

2. Enter HMI IP: <ftp://192.168.1.117/> (example), login user name: uploadhis, and the HMI history upload password (if not changed, the default is 111111). Or, directly enter <ftp://uploadhis:111111@192.168.1.117/>.

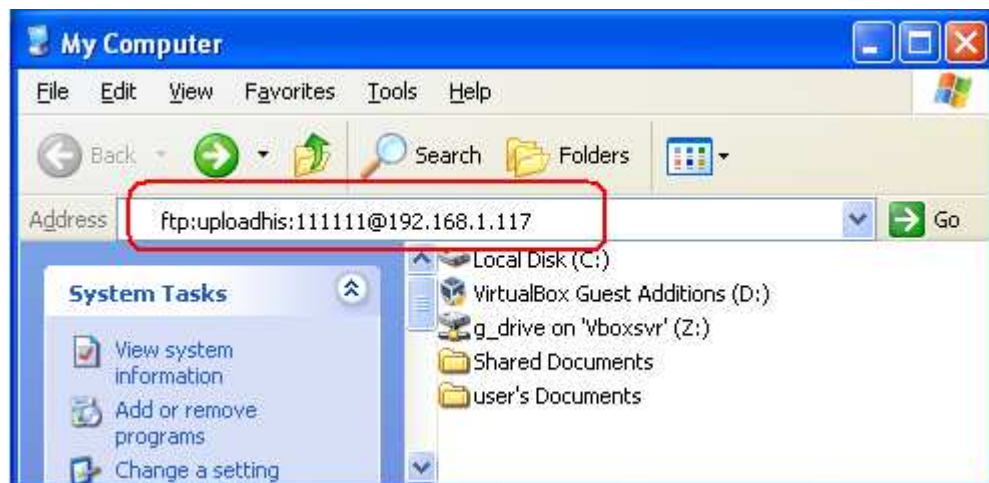


3. After entering IP, <ftp://192.168.1.117/> is shown, and the "datalog", "eventlog", and "recipe" folders can be found.

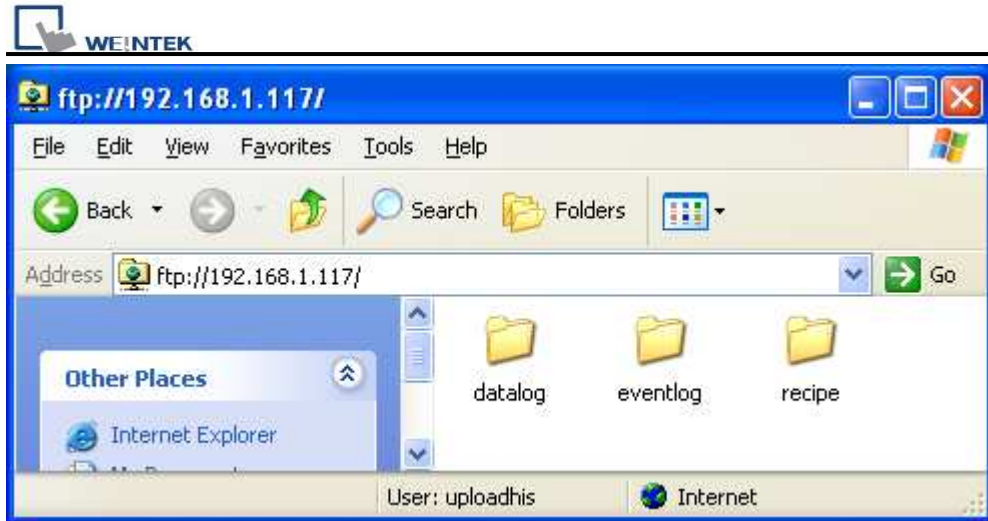

4. Click “recipe” folder to copy recipe.db file in PC.

5. Use “Recipe Database Editor” to “Import” recipe.db and then after editing the file, click “Export” to save the file to *.db format.

Note: Please go to C:\EBPro folder for executing “Recipe Database Editor”

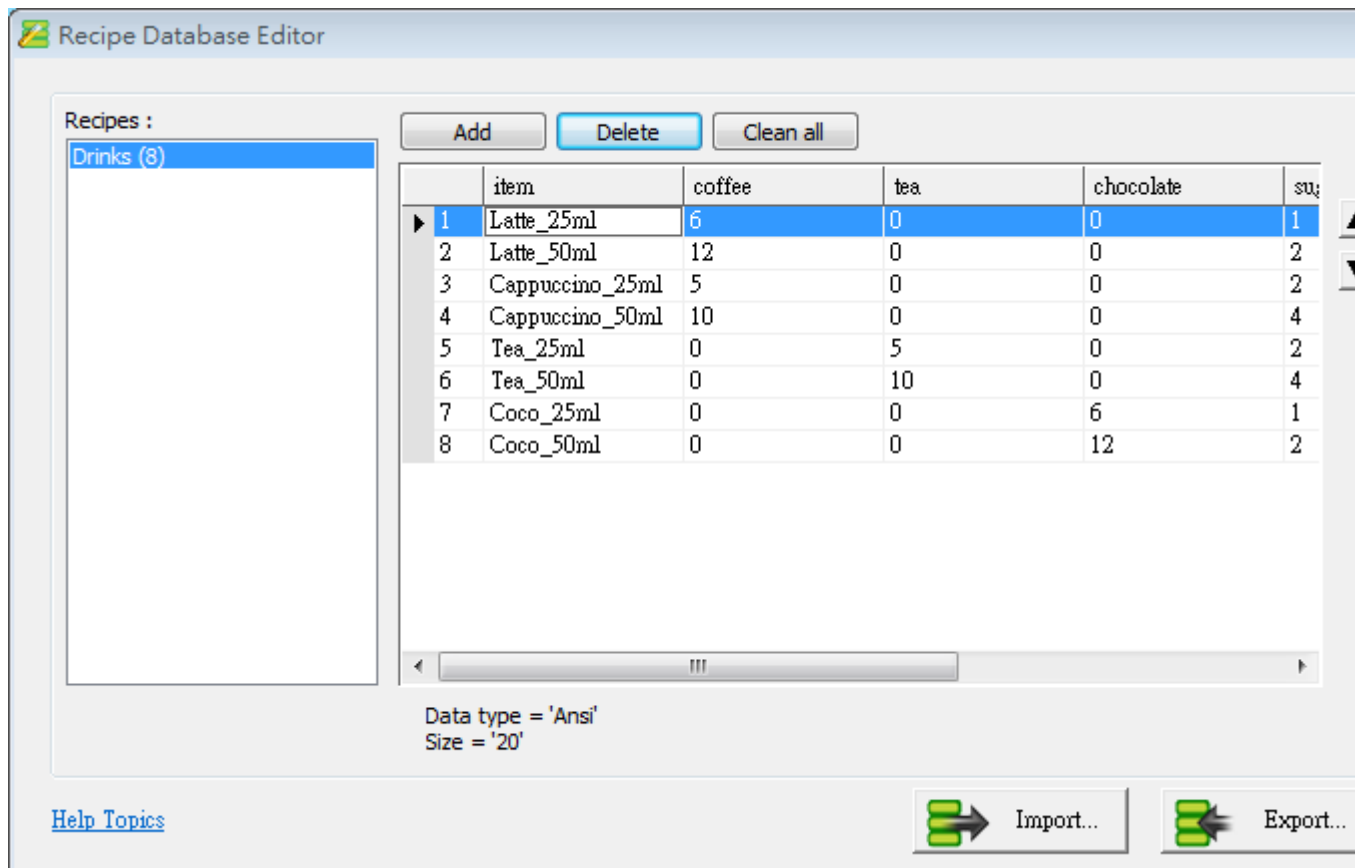

6. Download Recipe Database using Utility Manager. Tick [Reset recipe database] the Recipe database in HMI will be overwritten with the new settings.

Download

Firmware eMT3000 SERIES

Project

RW

RW_A

Recipe database C:\Users\Tina\Desktop\recipe.db

Data log

Startup screen

downloading C:\Users\Tina\Desktop\recipe.db
scan font : finished
reset HMI : finished
finished

Connection
 Ethernet USB cable

IP Name

HMI Name: Default HMI

192.168.1.60 (HMI_20120705)
192.168.1.70 (Default HMI)
192.168.1.74 (Default HMI)
192.168.1.75 (Default HMI)
192.168.1.117 (Default HMI)
192.168.1.87 (Default HMI)

Reboot HMI after download Reset recipe Reset recipe database
 Reset event log Reset data log